

JACKING BEAMS

HPJ2.0DE / HPJ2.8DE
Manual operated

MPJ2.0DE / MPJ2.8DE
Air operated



TRIPLE EIGHT
GARAGE EQUIPMENT



37 Broadway, Darras Hall, Ponteland, Newcastle upon Tyne. NE20 9PW
Tel: 07434 880888 / 01661 822288
Email: 888ge@btconnect.com Web: 888garage-equipment.com


JACKING BEAMS

Features:

- **Top Beam Extra-wide** extending top beam to 1700mm.
- **Ram and Scissors** - a full 205mm (8") lift with proven hydraulics, robust and very reliable.
- **Safety Features** - Hose burst valve, pressure release valve prevents overloading, finger guard complies with European machinery directive and CE marking.
- **Quietest Ever Pump** - The new quieter design of pump, built into every jack – significantly enhances performance and reduces noise as well as further improving operational reliability.
- **Two-Position Mechanical Lock** - Engages automatically creating safe working platform when carrying out extensive wheel overhauls.



- **Raiser Blocks** - Supplied as standard with each beam. Rubber-topped screw pad 1532A and aluminium block 1526 that will fit anywhere over the length of the beam.
- **Roller Hook or Roller Flat Support Arms** – Supplied as Standard - Easy roll operation from quality roller bearings – minimum effort, easy movement.

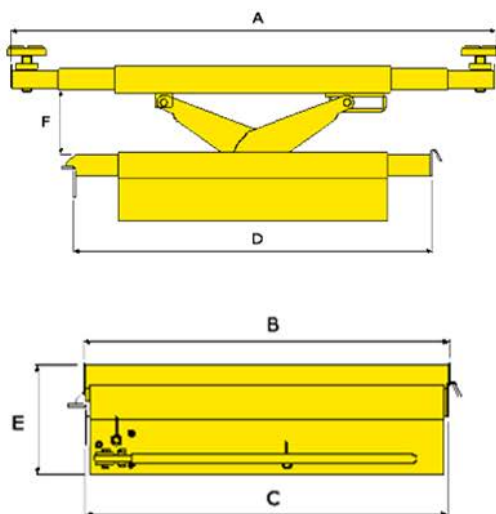

MODEL	RATED 2 TONNES	RATED 2.8 TONNES
MOT Approval for:	Class 4	Class 7
Manual	HPJ2	HPJ2.8
Air/Hydraulic	MPJ2	MPJ2.8
A Width when extended	1700mm	1700mm
B. Width when retracted	800mm	815mm
C. Minimum width over support arms	775mm	790mm
D. Maximum width over support arms	1125mm	1130mm
E. Closed Height	202mm	242mm
F. Total lift	260mm	260mm
*Height above platform/floor	75mm	92mm
* Can be set lower with special arms if required		
Weight—with top beam	8.7 Kg	113 Kg

